


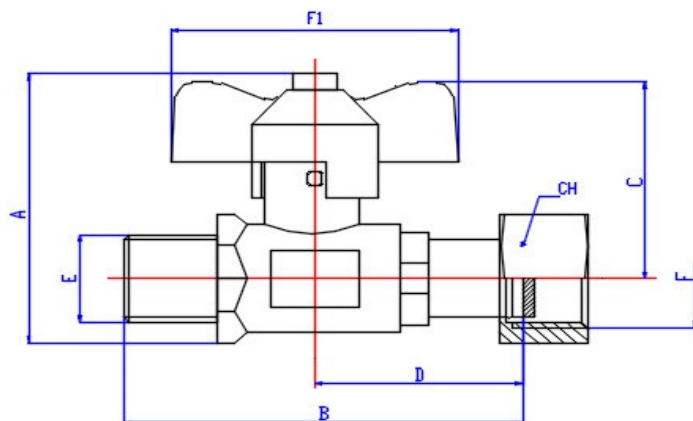

MATERIALS

BODY, SLEEVE, SWIVEL NUT: Brass CW617N

BALL: Brass CW614N chrome-plated

STEM, PACKING NUT (1/2" only): Brass CW614N

SEALS: pure PTFE

O-RINGS: 3014 Nbr+Fkm / 3014R Fkm

SEEGER for the nut: Stainless steel

HANDLE: Aluminium EN-AB46100

SCREW: Zincplated steel

ART. 3014
 Straight GAS ball cock m. with swivel nut
ART. 3014R
 Straight ball cock m. with swivel nut

E	F	A	B	C	D	F1	DN	PN Max BAR
1/2" Rp	1/2"	54,5	67	41	33	50	10	20
1/2" Rp	3/4"	54,5	67	41	33	50	10	20
3/4" Rp	3/4"	59	68	41	33	50	15	20

Working temperature:
Art. 3014 -20° +60°C
Art. 3014R -10° +150°C

Max pressure for gas: **5 bar (Mop5)**

Nut's thread: **UNI ISO 228/1**
 Body's thread: **UNI EN 10226-1 (ex ISO7/1)**

Conforming with: **UNI EN 331**
and Construction products regulation (EU)
No 305/2011 (CPR) System 3

FINAL TEST
 conforming with
UNI EN 12266-1 points A3 - A4