


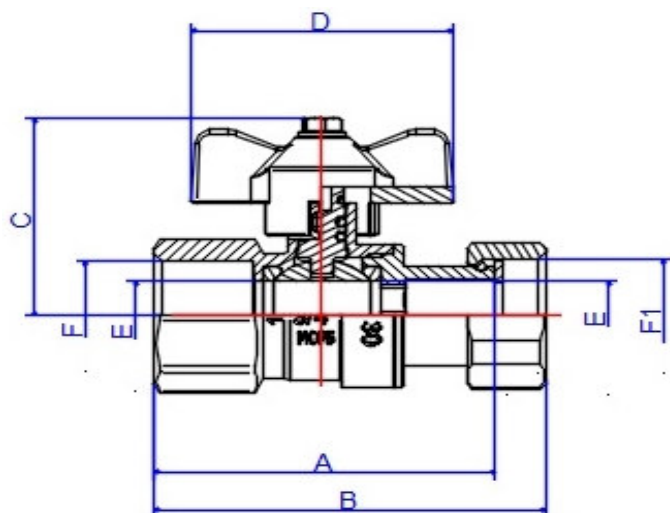

ART. 3016
 Straight GAS ball cock f. with swivel nut
ART. 3016R
 Straight ball cock f. with swivel nut


Misura Size	A	B	C	D	E	F	F1	PN Max BAR
1/2"	62	70	41	50	10	1/2" Rp	1/2" G	30
3/4"	65	75	43	50	15	3/4" Rp	3/4" G	30
3/4"x1"	70	79	43	50	15	3/4" Rp	1" G	30
1"	77	87	46	50	20	1" Rp	1" G	30

MATERIALS

BODY, SLEEVE, SWIVEL NUT: Brass CW617N
 BALL: Brass CW614N chrome-plated
 STEM, PACKING NUT (1/2" only): Brass CW614N
 SEALS: pure PTFE
 O-RINGS: 3016 Nbr+Fkm / 3016R Fkm
 SEEGER for the nut: Stainless steel
 HANDLE: Aluminium EN-AB46100
 SCREW: Zincplated steel
 FLAT GASKET: Fasit Omnia

TECHNICAL DATA

pressure / temperature

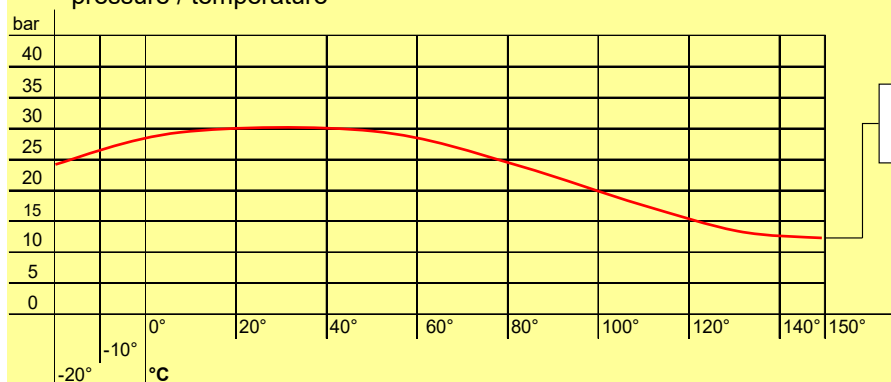

Flow rate:

1/2" 0,81 m³/h
 3/4" 1,64 m³/h
 1" 2,78 m³/h

Working temperature:
Art. 3016 -20° +60°C
Art. 3016R -10° +150°C

Max pressure for gas: **5 bar (Mop5)**

Nut's thread: **UNI ISO 228/1**
 Body's thread: **UNI EN 10226-1 (ex ISO7/1)**

Conforming with: **UNI EN 331**
and Construction products regulation (EU)
No 305/2011 (CPR) System 3

FINAL TEST
 conforming with
UNI EN 12266-1 points A3 - A4